


Change Over Valve

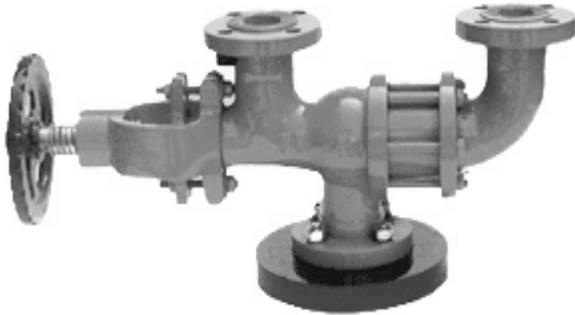

The Use of change over Valve allows for maintenance work required on the safety valve to be carried out without interrupting operation, by changing over to relevant standby safety valve, which takes over the function of protecting the plant against impermissible overpressure.

- Change over valve can handle 100% capacity of safety valve.
- Change over valve can accommodate One working & one standby safety valve all the time.
- Inbuilt interlocking arrangement is provided.

Features

- Full Bore Design.
- Stellite Seats.
- Sizes ½”(15 NB) to 2”(50 NB).
- Ends Screwed & Flanged to ANSI B 16.5 or DIN.
- Bodyinals: Carbon Steel, Stainless Steel, Alloy Steel.
- Internals : SS304 / SS316 / SS316L.
- Inspection by CCOE approved inspection agency on request.