


## Sifter

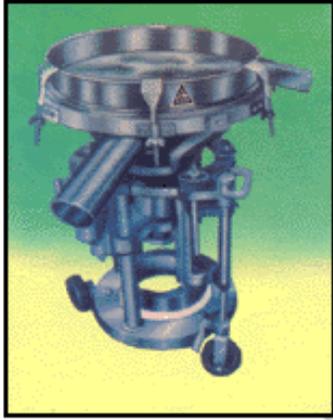

### Special Features

- Portable and Compact
- Standard machines are with TEFC motor Explosion proof / Flame proof motor optional.
- Lower energy consumption compared to the reciprocating vibrating systems.
- All contact parts and screen of AISI.
- Optional Accessories - brushing arrangements S.S. Lid with changing port aluminium ring and S.S. tie rod for fixing screen finer than 100 mesh.
- Easy dismantling and cleaning facility for contact rod.
- Wide range of screen size 4-300 mesh.

### Application

Chemical, Pharmaceutical, Dye stuff-pigments, Ceramics, Food Products, Detergents, Cosmetics, Pesticides and Fertilizers, Paper pulp resins, Paints, Polyester chips, minerals Rubber compounds slurries metal powders.

### Technical Data

1. Models	GE/SFT 500	GE/SFT 750
2. Motor	1.5 HP/1440 RPM 415 v	2 HP/1440 RPM
3. Energy Consume	1.2 K.W.	1.5 K.W.
4. Charging Height	1190 mm	1190 mm
5. Discharging Height	750 mm	750 mm
6. Foundation	Not Required	Not Required
7. Over all dimension	100X100X1100 mm	100X1100X1100 mm
8. Net Weight	300 kg	320 kg
9. Gross Weight	390 kg	430 kg
10. Capacity / Hour	20 to 100 kg	30 to 300 kg