

L SERIES

Ceiling Exhausters



L100/L150/L200/L250/L300
POLY GRILLE



L900/L1500
METAL GRILLE



L400/L500/L700
METAL GRILLE

FEATURES

- Low RPM for quiet operation
- Resilient anti-vibration blower mounts
- Dynamically balanced polymeric centrifugal blower wheel(s) for quiet efficient performance
- Permanently lubricated thermally protected 120v motor with plug disconnect, designed for continuous operation
- Round or rectangular duct connection
- Quiet automatic backdraft damper(s)
- Standard horizontal discharge (field convertible to vertical discharge)
- Wall or ceiling mount
- 8 position mounting brackets
- Insulated housing
- White polymeric (L100-300) or enamel coated steel (L400-1500) ceiling grille
- L100-300 UL listed for use over bathtubs or showers when connected to GFCI branch circuit

PERFORMANCE SPECIFICATIONS

MODEL	CFM @ .125" SP	SONES	AMPS	WATTS	SOUND INSULATION	DUCT
White Polymeric Grill						
L100	109	0.9	1.1	87	Yes	6"
L150	157	1.5	1.3	100	Yes	6"
L200	210	1.7	1.8	127	Yes	6"
L250	259	2.2	2.1	166	Yes	6"
L300	308	2.9	2.8	212	Yes	6"
L400	434	2.3	1.4	146	Yes	4 1/2" x 18 1/2"
L500	514	3.3	2.2	232	Yes	4 1/2" x 18 1/2"
L700	701	4.7	2.9	313	Yes	4 1/2" x 18 1/2"
L900	901	4.1	3	306	--	8" x 12"
L1500	1513	8.4	5	468	--	8" x 12"

OPTIONS & ACCESSORIES


- Internal or remote speed control
- Wall cap, roof jack, roof cap (self-flash or curb mounted)
- Inline adapter, rectangular to round discharge adapter (L400-1500)
- RIS hanging isolators
- White enamel coated steel ceiling grille (L100-300)




Models L100, L150, L200, L250 and L300 are UL listed for use over bathtubs and showers when connected to a GFCI-protected branch circuit.

DIMENSIONS


L100/L150/L200/L250/L300
POLY GRILLE

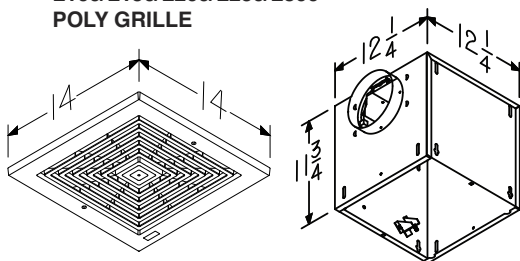

L400/L500/L700
METAL GRILLE

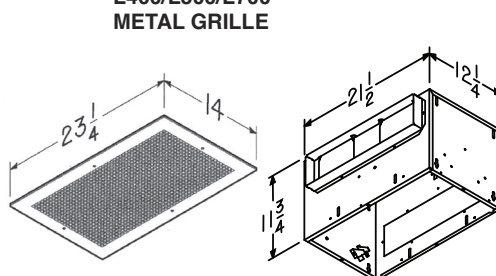

L900/L1500
METAL GRILLE

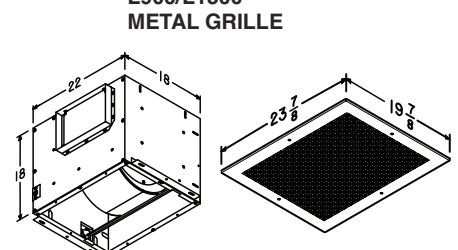


FAN CURVES


L SERIES

Ceiling Exhausters


L100/L150

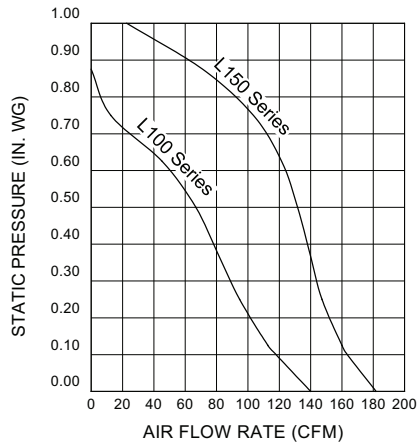


L200/L250/L300

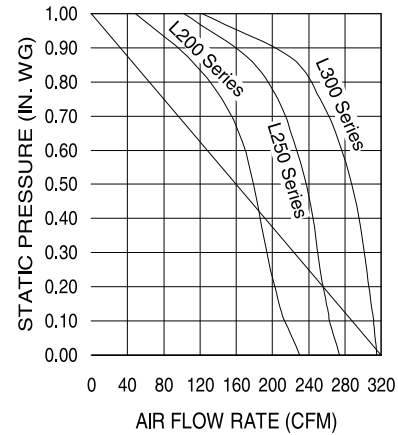

L400/L500/L700

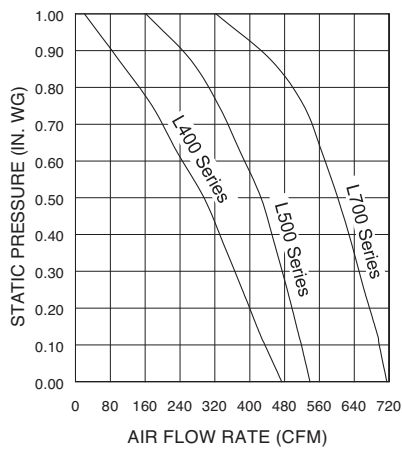

L900/L1500

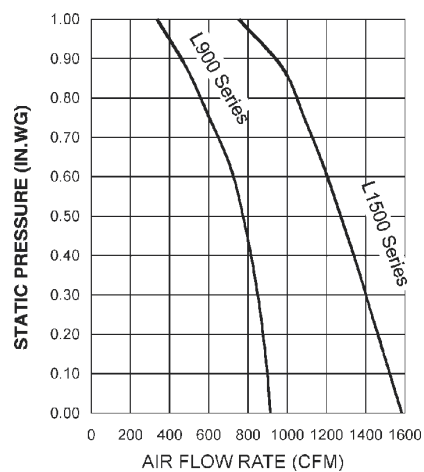

Canarm Model	Watts Amps	Nom RPM	CFM @ INWG										Unit Weight	Discharge Size
			FA	0.100	0.125	0.250	0.375	0.500	0.625	0.750	0.875	1.000		
L100	87 1.1	640 Sones	136 0.5	115 0.8	109 0.9	93 1.3	80 1.8	65 2.3	44 3.0	12 3.5			22.8 lbs	6" Rd
L150	100 1.3	710 Sones	181 1.3	161 1.4	157 1.5	141 2.2	132 2.6	124 3.1	114 3.6	94 4.1	62 4.6		23.1 lbs	
L200	127 1.8	740 Sones	231 1.6	214 1.8	210 1.7	196 2.3	186 2.9	177 3.5	165 4.1	144 4.9	113 5.3	51 5.3	23 lbs	8" Rd
L250	166 2.1	830 Sones	272 2.1	261 2.3	259 2.2	250 2.9	242 3.3	233 3.9	218 4.4	201 4.8	165 5.5	99 5.8	23.1 lbs	
L300	212 2.6	905 Sones	312 2.8	309 2.9	308 2.9	303 3.3	296 3.5	287 3.9	273 4.3	254 4.7	219 5.1	125 5.6	23.1 lbs	
L400	146 1.4	735 Sones	480 2.0	442 2.4	434 2.3	388 2.8	344 3.3	299 3.8	229 4.5	182 4.8	114 5.4	33 5.6	33.8 lbs	18-1/2" x 4-1/2"
L500	232 2.2	810 Sones	538 3.0	520 3.1	514 3.3	491 3.6	463 4.0	434 4.4	389 5.0	339 5.7	282 6.2	186 6.7	33.8 lbs	
L700	313 2.9	960 Sones	722 4.5	704 4.6	701 4.7	667 4.8	640 5.0	607 5.2	571 5.6	534 6.2	453 7.1	333 7.2	33.9 lbs	
L900	306 3.0	650 Sones	918 3.8	905 4.0	901 4.1	877 4.0	842 4.2	793 4.3	725 4.4	636 4.9	536 4.5	390 5.3	64.2 lbs	12" x 8"
L1500	468 5.0	955 Sones	1,578 8.6	1,526 8.4	1,513 8.4	1,438 8.1	1,371 7.5	1,285 7.0	1,198 6.7	1,103 6.2	1,000 5.8	816 5.8	64.3 lbs	

L & L-L SERIES ACCESSORIES

CEILING RADIATION DAMPERS



Models RD1/RD2/RD3



When excessive heat is detected, the breakaway fusible link triggers the closing of the radiation damper's fire resistant screen to prevent smoke and fire from travelling through the ductwork.

INLINE ADAPTOR KITS FOR CEILING EXHAUST FANS

Models IA961L/IA981L/IA982L/IA983L



WALL CAPS

Models WC4A/WC6A/WC8A/WC10A/WC12A




ROOF CAPS

Models RCSF6/RCSF8/RCSF10/RCSF12/RCCM6/RCCM8/RCCM10/RCCM12




ROOF JACKS

Models RJ636/RJ634/RJ437/RJ4P/RJ6P




TRANSITIONS

Models TRN423/TRN81212



CONTROLS

MC80L



MC3/MC5

