

## Automation valve

---

### Pneumatic Operated Ball Valve

---



Body Style	: Three Piece
Ports	: Reduce Port \ Full Port
Size Range	: ½ " to 24" (15mm to 600mm)
Temperature	: 205° C (400° F)
Pr. Rating	: CL-150\300\600\900\1500\2500
End Connection	: Flanged CL-150\300\600\900\1500\2500

### Pneumatic Operated with manual override Ball Valve

---



Body Style	: One \ Two \ Three Piece
Ports	: Reduce Port \ Full Port
Size Range	: ½ " to 24" (15mm to 600mm)
Temperature	: 205° C (400° F)
Pr. Rating	: CCL-50\300\600\900\1500\2500
End Connection	: Flanged CL-150\300\600\900\1500\2500

## Electrical Operated Ball Valve


---



Body Style	: One \ Two \ Three Piece
Ports	: Reduce Port \ Full Port
Size Range	: ½ " to 24" (15mm to 600mm)
Temperature	: 205° C (400° F)
Pr. Rating	: CL-150\300\600\900\1500\2500
End Connection	: Flanged CL-150\300\600\900\1500\2500

## Limit switch Ball Valve

---

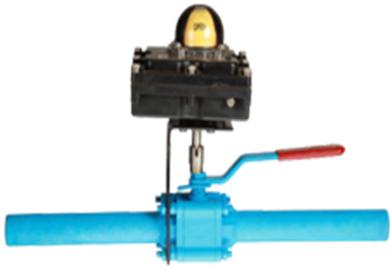

Body Style	: One \ Two \ Three Piece
Ports	: Reduce Port \ Full Port
Size Range	: ½ " to 24" (15mm to 600mm)
Temperature	: 205° C (400° F)
Pr. Rating	: CL-150\300\600\900\1500\2500
End Connection	: Flanged CL-150\300\600\900\1500\2500

