


ISOLATORS

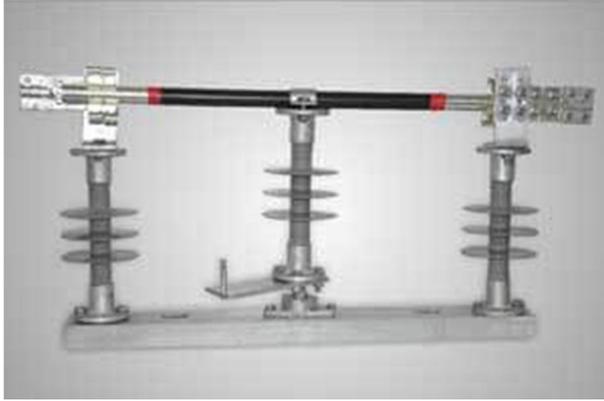

The isolators are mechanically operated type of safety device incorporated for the isolation of system. The open position provides safe and desired isolation. They are widely applicable for isolation of part or complete system for carrying maintenance, repairs and similar activities where system has to be isolated from primary circuit. SRI offers double break center rotating polymeric Isolator in voltage range of 11-33 kV and current 400 A, 630 A, 800 A & 1250 A.

SRI Isolators are type tested as per IS/IEC standards at CPRI, ERDA to pass all required primary and supplementary tests.