


Chain Sling

RMEI Chain Link are specially designed and manufactured to provide excellent service in severe working conditions. Our chains are manufactured to close tolerances with the most modern equipment in the industry.

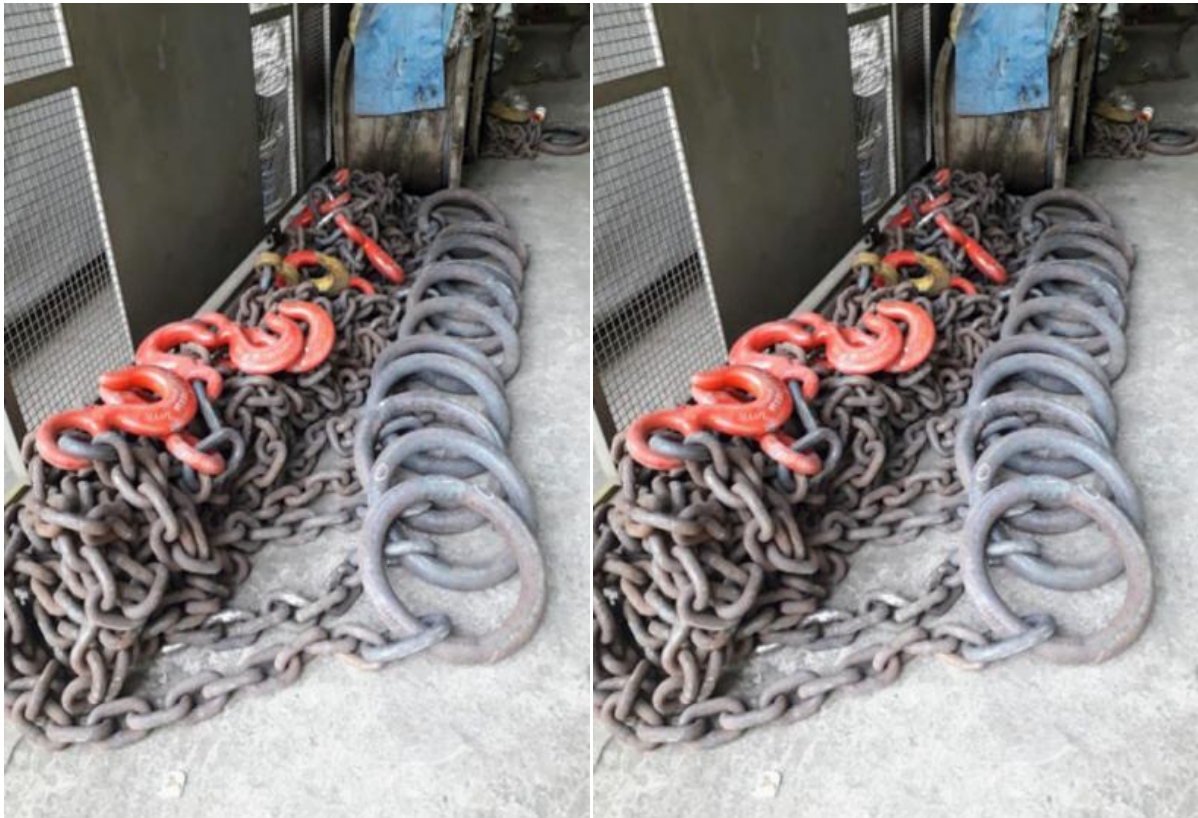

- RMEI Chain Links are available in following specification.
- Single Leg, Endless, 2 Legs, 3 Legs, 4 Legs, 2 Loop
- 101.6MM Pitch To 260 MM Pitch
- Range of materials For Link- GR-30, GR-63, GR-80
- Rod Dia-14MM, 16MM, 20MM, 22MM, 28MM, 32MM 36MM.
- Heat Treatment for Sprocket-Teeth Flame Hardness (40-45 HRC)
- After final heat treatment sling with accessories shall be tested as an assembly, multi-leg chain slings shall be tested in section.