


## Electric Trolley




- **Design:** Compact and adjustable design to suit different beam sizes.
- **Lateral wheel (IT onwards):** Ensures smooth operation.
- **Operation:** From Pendant.
- **Trolley wheels:** Accurately machined precision cut on anti friction bearing.
- **Powder Coated finish:** For added rust protection and better aesthetic look.



DESCRIPTION	FHET-05	FHET-10	FHET-20	FHET-30	FHET-50
CAPACITY(Kgs.)	500	1000	2000	3000	5000
SPEED (MPM)	10				
MOTOR (kw)	0.2	0.4	0.4	0.4	0.75
MINIMUM RADIUS (M)	1.0				
DIMENSIONS (mm)					
A	196	315	325	340	400
B	248	212	220	250	291
R	142	142	142	142	142
T	159	231	231	231	231
BEAM SIZE (mm)	70-130	80-160	80-160	100-180	110-180

## Crane Load Cell

- High-quality Alloy Steel Receptor.
- Aluminium die-casting enclosure.
- 38mm LED & LCD display with backlight.
- Heavy-duty bow shackle.
- Heavy-duty eye hook.
- High capacity rechargeable battery.
- Water-proof panel button.
- Infrared remote controlling.
- Capacity: 1000kg. - 20000kg.




DESCRIPTION	FHCLC-01	FHCLC-02	FHCLC-03	FHCLC-05	FHCLC-10	FHCLC-15	FHCLC-20
CAPACITY(Kgs.)	1000	2000	3000	5000	10000	15000	20000
DIMENSIONS (mm)							
A	58	58	73	92	94	128	135
B	83	83	107	135	145	178	250
C	30	30	33	45	60	75	75
L	420	420	480	585	770	860	950
NET WEIGHT (Kgs)	12	13	15	24	43	61	64



## Permanent Magnet Lifter





- Maximum pulling force is greater than 3.5 times rated lifting capacity.
- Largest available capacity is 5,000 Kg.
- Simple switch and safety button design allows for one handed operation.



DESCRIPTION	FHPML-01	FHPML-03	FHPML-05	FHPML-06	FHPML-10	FHPML-15	FHPML-20	FHPML-30	FHPML-50
CAPACITY(Kgs.)	100	300	500	600	1000	1500	2000	3000	5000
DIMENSIONS (mm)									
L	92	165	216	236	264	352	378	453	647
B	64	88	118	118	168	168	226	290	290
H	70	96	118	120	168	168	216	265	265
R	145	176	219	219	285	380	462	567	707
NET WEIGHT (Kgs)	3	10	20	24	50	70	125	220	355
MAX. PULL OFF									
STRENGTH (Kgs)	350	1050	1750	2100	3500	5200	7000	10500	17500
OPERATION TEMP.( C)	<80	<80	<80	<80	<80	<80	<80	<80	<80

## Beam Trolley

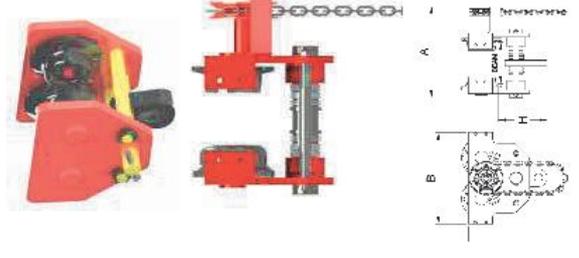

Model	Capacity (Tons)	I-Beam width (mm)	Net Weight (kg)	A (mm)	B (mm)	C (mm)	H (mm)
MPT-1	1	60-150	10	250	242	220	129
MPT-2	2	90-160	13	300	242	220	129
MPT-3	3	90-160	13	300	242	220	129

Model	Capacity (Tons)	I-Beam width (mm)	Net Weight (kg)	A (mm)	B (mm)	C (mm)	H (mm)
GT-1	1	60-150	13	314	242	220	129
GT-2	2	90-160	16	364	242	220	129
GT-3	3	90-160	16	364	242	220	129
GT-5	5	110-150	47	400	400	143.5	171