



Pulling & Lifting Machine


Design: Compact and robust design.
Construction: Die casting, light weight, durable.
Operation: Simple lever operation.
Application: For Pulling and Lifting. Can be used at any working angle with sheaves.
Capacity: Available in three capacities. Capacity can be enhanced with sheave pulley.
Safety: Two safety devices guarantee safe operation.

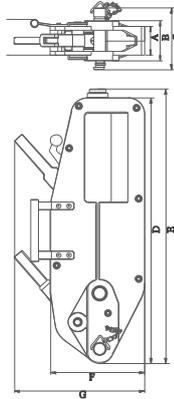

E.O.T. Cranes

Ferrettero EOT Crane Features

Type: Single Girder/ Double Girder/ Underslung type.
Capacity: 0.5T to 25T.
Code: IS 807, 3177, 800 .
Operation: All electrical .
Main girder: Rolled ISMB/ Plate fabricated as per design.

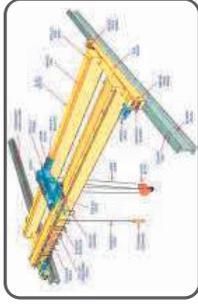

Ferrettero GANTRY Crane Features

Type: Single Girder/ Double Girder. Portable with castors.
Capacity: 0.5T to 20T.
Code: IS 807, 3177, 800 .
Operation: Manual/electrical.
Main girder: Rolled ISMB/ Plate fabricated as per design.




Ferrettero HOT Crane Features

Type: Single Girder/ Double Girder/ Underslung type.
Capacity: 0.5T to 20T.
Code: IS 807, 3177 & 3832
Operation: All motion manual by means of endless H. Chain.
Main girder: Rolled ISMB/ Plate fabricated as per design.



Ferrettero JIB Crane Features

Type: Self supporting Pillar mounted or Wall mounted
Capacity: 0.5T to 3T.
Swivel : 180/360 Degree.
Swivelling : Manual/Electrical.
Main girder: Rolled ISMB/ Plate fabricated as per design.

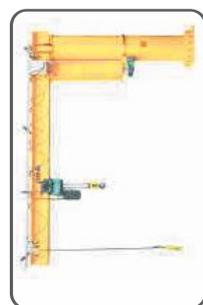

Description	MODEL		
	FHPL-08	FHPL-16	FHPL-32
Capacity			
a. LIFTING	0.8T	1.6T	3.2T
b. PULLING	1.2 T	2.4T	4.8T
ROPE DIA. (mm)	8.3	11	16
ROPE SAFETY FACTOR	5	5	5
LENGTH OF HANDLE (mm)	800	800/1200	800/1200
DIMENSIONS(mm):			
A	44	56	70
B	60	68	98
C	101	120	150
D	420	545	645
E	430	556	666
F	172	200	227
G	240	270	320
RATED FORWARD HANDPOWER (n)	343	400	441
RATED FORWARD TRAVEL (mm)	>=52	>=55	>=28
			>=30