

# "SIR" Balancing Valve


## Features

- **DESIGN STANDARD:** BS 7350
- PROCESS DOUBLE REGULATION
- TEMPER PROOF SETTING
- HANDWEEL OPERATED
- LOW NOISE FLEW
- AVAILABLE WITH OR WITHOUT DRAIN COCKS
- **FLANGE STANDARD:** BS4504
- **RATING:** PN16



## Product Materials

PT No.	PART NAME	MATERIAL
01	BODY	C.I / D.I
02	DISC	D.I / M.S / S.S
03	Seat	EPDM / Nitrile
04	Stem	SS410
05	Seal	EPDM
06	O-Ring	EPDM
07	Bonnet	C.I / D.I
08	Guide	Nylon / M.S
09	Check Nut	Brass
10	Cover	D.I
11	Scale I	M.S
12	Balancing Nut	S.S
13	Scale II	C.I
14	Hand Wheel	C.I
15	Nut	M.S
16	Plug	M.S

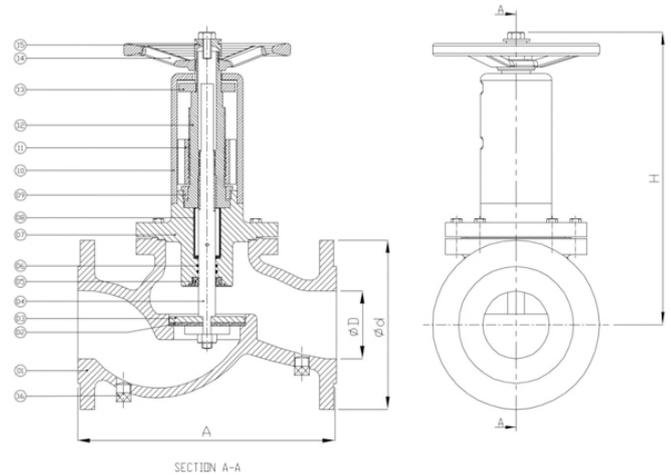

## Sizes / Dimensions

SIZE	50	65	80	100	125	150	200	250	300
A	230	290	310	350	400	480	600	730	850
H	218	223	355	275	290	370	415	535	565
ØD	50	65	80	100	125	150	200	250	300
Ød	165	185	200	220	250	285	340	405	460
PCD	125	145	160	180	210	240	295	350	400
No. of Holes	4	4	4	8	8	8	8	12	12
Hole dia.	19	19	19	19	19	23	23	23	23
WHEEL Dia.	200	200	200	200	300	300	300	300	300



## S.S. INDUSTRIES

D108 & D109 Focal Point Extension,  
Jalandhar - 144004, Punjab INDIA

Mobile: +91 95927-77777, +91 99153-10936

Phone: 0181-5015378

Email: [sales@sirvalve.com](mailto:sales@sirvalve.com), Website: [www.sirvalve.com](http://www.sirvalve.com)