

Forged Steel Gate Valve



“VALTECH” compact design & high pressure, Forged Steel Gate Valves are designed and manufactured with reference to standard API 602 for small Pipelines up to 50NB. They are available in Threaded as well as Socket Weld ends. Hard Faced Trim material ensures perfect Sealing and longer life. Lapped Back Seat is provided to ensure re-packing/replacing of Gland Packing in stream, when the Valve is in full open condition which ensures maximum safety, convenience and economy. If required, Valves can be offered under any THIRD PARTY INSPECTION.

“VALTECH” Gate Valves are available in various materials like Forged Carbon Steel conforming to ASTM-A-105, Forged Alloy Steel like ASTM-A-182-F11, F22 and Forged Stainless Steel like ASTM-A-182 F304, F304L, F316 and F-316L. Size range starts from 15 NB through 50NB and pressure rating up to ANSI 2500#.

MANUFACTURING REFERENCE STANDARDS

Design API 602 / ANSI B 16.34 / BS-EN-ISO-15761-2002


Ends Socket Weld to ANSI B 16.11 / Screwed to ANSI B 2.1

Testing API 598

MATERIAL OF CONSTRUCTION

| Sr.No. | Parts Name | Material | | |
|--------|----------------|---|-------------|-----------------|
| | | Carbon Steel | Alloy Steel | Stainless Steel |
| 1 | Body | FCS | FAS | FSS |
| 2 | Bonnet | A-105 | F-11/F-22 | F-304/316 |
| 3 | Seat Ring | SS-410 | SS-410 | SS-304/316 |
| 4 | Wedge | CA-15 | CA-15 | CF8/CF8M |
| 5 | Spindle | SS-410 | SS-410 | SS-304/316 |
| 6 | Gasket | Spiral wound SS-304/316 with Grafoil filled | | |
| 7 | Bonnet Bolt | Alloy steel A-193 Gr. B7 | | |
| 8 | Screw | Carbon Steel | | |
| 9 | Washer | Carbon Steel | | |
| 10 | Gland Packing | Grafoil | | |
| 11 | Gland Bush | SS-410 | SS-410 | SS-304/316 |
| 12 | Gland Flange | Forged Carbon Steel ASTM-A-105 | | |
| 13 | Eye Bolt & Nut | Alloy steel / Carbon steel | | |
| 14 | Yoke Sleeve | S.G. Iron ASTM-A-536 Gr. 80-55-06 | | |
| 15 | Hand Wheel | Malleable Iron | | |
| 16 | Hand Wheel Nut | Carbon Steel | | |
| 17 | Back Seat | Integral with Bonnet | | |

DIMENSIONS

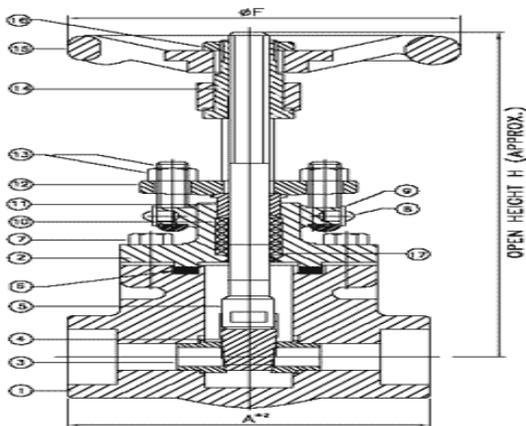

DIMENSIONS

| SIZE | | 800# | | | 1500# | | | 2500# | | |
|------|--------|------|-----|-----|-------|-----|-----|-------|-----|-----|
| MM | INCH | A | Ø F | H | A | Ø F | H | A | Ø F | H |
| 15 | ½" | 87 | 85 | 169 | 90 | 90 | 171 | 105 | 90 | 181 |
| 20 | ¾" | 90 | 85 | 174 | 105 | 90 | 190 | 128 | 145 | 260 |
| 25 | 1" | 105 | 90 | 194 | 128 | 145 | 256 | 142 | 145 | 276 |
| 32 | 1.1/4" | 128 | 145 | 267 | 142 | 145 | 269 | * | * | * |
| 40 | 1.1/2" | 128 | 145 | 267 | 142 | 145 | 274 | * | * | * |
| 50 | 2" | 142 | 145 | 277 | * | * | * | * | * | * |

Cast Steel Gate Valve (Bolted Bonnet)



“VALTECH” robust design, Cast Steel Gate Valves are designed and manufactured with reference to standard API 600 for Pipelines 50NB and above. They are available in Flanged and Butt weld ends. Hard Faced Trim material ensures perfect Sealing and longer life. Lapped Back Seat is provided to ensure re-packing/replacing of Gland Packing in stream, when the Valve is in full open condition which ensures maximum safety, convenience and economy. If required, Valves can be offered under any THIRD PARTY INSPECTION .

“VALTECH” Gate Valves are available in various materials like Cast Carbon Steel conforming to ASTM-A-216 Gr. WCB, Cast Alloy Steel like ASTM-A-217 Gr. WC-6 / WC-9; and Cast Stainless Steel like ASTM-A-351 Gr. CF-8, CF-3, CF-8M & CF-3M. Size range starts from 50 NB through 900NB and pressure rating from 150# to 600#.

MANUFACTURING REFERENCE STANDARDS


| | |
|-----------|--|
| Design | API 602 / ANSI B 16.34 |
| Ends | Flanged to ANSI B 16.5 / Butt Weld to ANSI B 16.25 |
| Testing | API 598 |
| Operation | Handwheel, Gear, Actuator. |

MATERIAL OF CONSTRUCTION

| Sr.No. | Parts Name | Material | Carbon Steel | Alloy Steel | Stainless Steel |
|--------|-----------------------|---|--------------|--|---------------------------|
| 1 | Body | | | | |
| 2 | Bonnet | CCS A-216Gr. WCB | | CAS A-217 Gr.WC6 / WC9 | CSS A-351 Gr. CF-8 /CF-8M |
| 3 | Yoke | | | | |
| 4 | Wedge (Flexible) | CCS A-216Gr. WCB+ 13% Cr Facing | | CAS A-217 Gr.WC6 / WC9 + 13% Cr Facing | |
| 5 | Seat Ring (Seal Weld) | | | | Integral with body |
| 6 | Spindle | SS A-276 TP 410 | | | |
| 7 | Gland Bush | SS A-276 TP 410 | | | SS A276 TP 304/316 |
| 8 | Gland Flange | Carbon Steel IS-2062 | | | |
| 9 | Gasket | Spiral Wound SS 304 / 316 with Grafoil Filled | | | |
| 10 | Bonnet Stud | Alloy Steel A-193 Gr. B7 | | | |
| 11 | Bonnet Stud Nut | Carbon Steel A-194 Gr.2H | | | |
| 12 | Yoke Stud | Alloy Steel A-193 Gr. B7 | | | |
| 13 | Yoke Stud Nut | Carbon Steel A-194 Gr.2H | | | |
| 14 | Bonnet Bush | SS A 276 TP 410 | | Integral with bonnet | |
| 15 | Gland Packing | Grafoil | | | |
| 16 | Cross Bolt | Carbon Steel A-307 Gr.B | | | |
| 17 | Cross Bolt Nut | Carbon Steel A-563 Gr.A | | | |
| 18 | Eye Bolt | Carbon Steel A-307 Gr.B | | | |
| 19 | Eye Bolt Nut | Carbon Steel A-563 Gr.A | | | |
| 20 | Yoke Sleeve | S.G. Iron ASTM-A-536 Gr. 80-55-06 | | | |
| 21 | Locking Screw | Carbon Steel IS-6094 | | | |
| 22 | Hand Wheel | Fabricated Carbon Steel | | | |

| | | |
|----|----------------|---------------------------------|
| 23 | Hand Wheel Key | Carbon Steel IS-2062 |
| 24 | Hand Wheel Nut | Carbon Steel A-563 Gr.A |
| 25 | Name Plate | SS A-240 TP-304 |
| 26 | Yoke Cover | Cast Carbon Steel A-216 Gr. WCB |
| 27 | Thrust Bearing | Bearing Steel |

DIMENSIONS

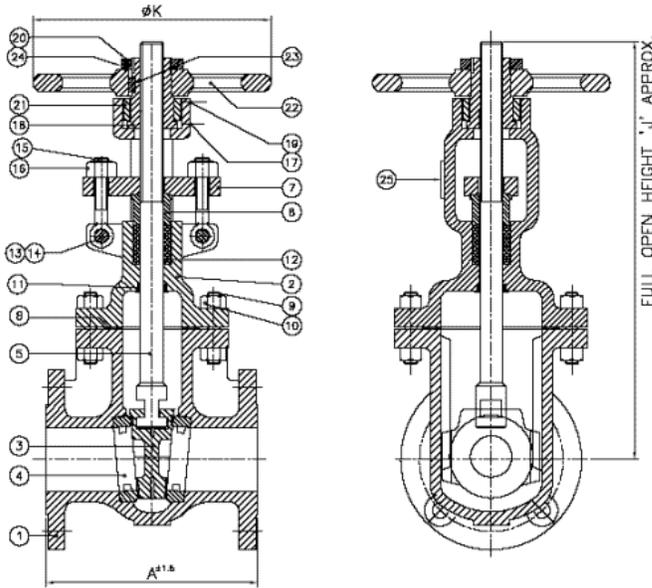

DIMENSIONS

| SIZE | | 150# | | | 300# | | | 600# | | |
|------|--------|------|-------|-----|------|------|-----|------|------|-----|
| MM | INCH | A | J | ØK | A | J | ØK | A | J | ØK |
| 50 | 2" | 178 | 411 | 203 | 216 | 420 | 203 | 292 | 426 | 203 |
| 65 | 2.1/2" | 190 | 430 | 203 | 241 | 478 | 254 | 330 | 520 | 203 |
| 80 | 3" | 203 | 497 | 256 | 283 | 546 | 254 | 356 | 551 | 305 |
| 100 | 4" | 229 | 614.5 | 256 | 305 | 602 | 305 | 432 | 660 | 305 |
| 125 | 5" | 254 | 736 | 305 | 381 | 787 | 356 | * | * | * |
| 150 | 6" | 267 | 830.5 | 305 | 403 | 890 | 356 | 559 | 942 | 508 |
| 200 | 8" | 292 | 1026 | 356 | 419 | 1120 | 406 | 660 | 1257 | 508 |
| 250 | 10" | 330 | 1252 | 406 | 457 | 1310 | 508 | 787 | 1494 | 610 |
| 300 | 12" | 356 | 1466 | 508 | 502 | 1450 | 551 | 838 | 1718 | 660 |
| 350 | 14" | 381 | 1610 | 560 | 762 | 1690 | 711 | 889 | 1865 | 762 |

| | | | | | | | | | | |
|-----|-----|-----|------|-----|------|------|------|------|------|-----|
| 400 | 16" | 406 | 1830 | 610 | 838 | 1980 | 726 | 991 | 2053 | 864 |
| 450 | 18" | 432 | 2070 | 610 | 914 | 2107 | 865 | 1092 | 2286 | 864 |
| 500 | 20" | 457 | 2410 | 700 | 991 | 2303 | 915 | 1194 | 2508 | 965 |
| 600 | 24" | 508 | 2770 | 700 | 1143 | 2561 | 1070 | 1397 | 2927 | 965 |
| 650 | 26" | 559 | 2800 | 508 | * | * | * | * | * | * |
| 700 | 28" | 610 | 3065 | 508 | * | * | * | * | * | * |
| 750 | 30" | 610 | 3295 | 610 | * | * | * | * | * | * |
| 800 | 32" | 610 | 3610 | 610 | * | * | * | * | * | * |
| 900 | 36" | 711 | 3840 | 650 | * | * | * | * | * | * |

Cast Steel Gate Valve (Pressure Seal Bonnet)



“VALTECH” robust design, Cast Steel Pressure Seal Gate Valves are designed and manufactured with reference to Standard API 600 for Pipelines 50NB and above. They are available in Flanged and Buttweld ends. Hard Faced Trim material ensures perfect Sealing and longer life. Lapped Back Seat is provided to ensure re-packing/replacing of Gland Packing in stream, when the Valve is in full open condition which ensures maximum safety, convenience and economy. If required, Valves can be offered under any THIRD PARTY INSPECTION .

“VALTECH” Cast Steel Pressure Seal Gate Valves are available in various materials like Cast Carbon Steel conforming to ASTM-A-216 Gr. WCB, Cast Alloy Steel like ASTM-A-217 Gr. WC-6 / WC-9; and Cast Stainless Steel like ASTM-A-351 Gr. CF-8, CF-3, CF-8M & CF-3M. Size range starts from 50 NB through 900NB and pressure rating from 900# to 2500#


MANUFACTURING REFERENCE STANDARDS

| | |
|-----------|--|
| Design | API 600 / ANSI B 16.34 |
| Ends | Flanged to ANSI B 16.5 / Butt Weld to ANSI B 16.25 |
| Testing | API 598 |
| Operation | Handwheel, Gear, Actuator. |

MATERIAL OF CONSTRUCTION

| Sr.No. | Parts Name | Material | | |
|--------|-----------------------|---|---------------------------------|---------------------------|
| | | Carbon Steel | Alloy Steel | Stainless Steel |
| 1 | Body | CCS A-216Gr. WCB | CAS A-217 Gr.WC6 / WC9 | |
| 2 | Bonnet | | | |
| 3 | Wedge (Flexible) | CCS A-216 Gr. WCB + Stelited | CAS A-217 Gr.WC6/WC9 + Stelited | CSS A-351 Gr. CF-8 /CF-8M |
| 4 | Seat Ring (Seal Weld) | SS A-276 TP 410 / 304 + Stld | | |
| 5 | Yoke | CCS A-216 Gr. WCB | CAS A-217 Gr.WC6/WC9 | |
| 6 | Bonnet Bush | SS A-276 TP 410 | | SS A276 TP 304/316 |
| 7 | Gasket | Spiral Wound SS 304/316 with Grafoil Filler | | |
| 8 | Retainer Ring | SS A-312 TP 304 | | SS A-276 TP 304/316 |
| 9 | Split Ring | | | |
| 10 | Cover | CCS A-216 Gr. WCB | | CSS A-351 Gr.CF8/CF8M |
| 11 | Gland Packing | Grafoil | | |
| 12 | Gland Bush | SS A-276 TP 410 | | SS A-276 TP 304/316 |
| 13 | Gland Flange | CS A-515 Gr.70 | | CS IS-226 |
| 14 | Thrust Bearing | Ball Bearing Steel | | |
| 15 | Yoke Sleeve | S.G. Iron ASTM-A-536 Gr. 80-55-06 | | |
| 16 | Brg. Housing Cover | CS A-515 Gr.70 | | |
| 17 | Key | | | |
| 18 | Hand Wheel | Fabricated Carbon Steel | | |
| 19 | Hand Wheel Nut | CS A-515 Gr.70 | | |
| 20 | Stud & Nut | AS/CS A-193 Gr.B7 & A-194 Gr. 2H | | |
| 21 | Spindle | SS A-276 TP 410 | | SS A-276 TP 304/316 |

DIMENSIONS

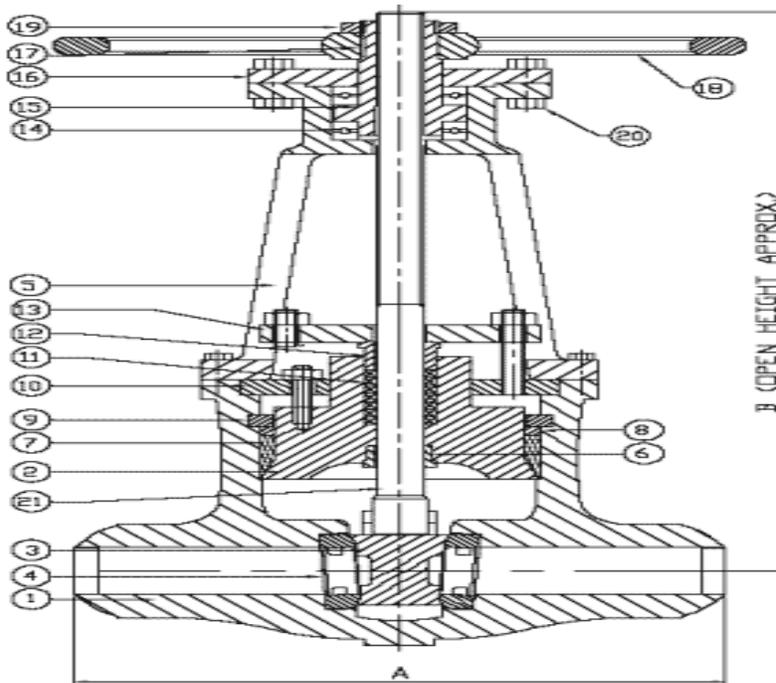

DIMENSIONS

| SIZE | | 900# | | 1500# | | 2500# | |
|------|------|------|------|-------|------|-------|------|
| MM | INCH | A | B | A | B | A | B |
| 50 | 2" | 216 | 470 | 216 | 470 | 279 | 450 |
| 80 | 3" | 305 | 580 | 305 | 580 | 368 | 710 |
| 100 | 4" | 356 | 730 | 406 | 730 | 457 | 720 |
| 150 | 6" | 508 | 890 | 559 | 890 | 610 | 925 |
| 200 | 8" | 660 | 1040 | 711 | 1375 | 762 | 1370 |
| 250 | 10" | 787 | 1540 | 864 | 1540 | 914 | 1490 |
| 300 | 12" | 914 | 1785 | 991 | 1720 | 1041 | 1690 |
| 350 | 14" | 991 | 1825 | 1067 | 1730 | 1118 | 1850 |

Forged Steel Globe Valve



“VALTECH” compact design & high pressure, Forged Steel Globe Valves are designed and manufacture with reference to standard API 602 for small Pipelines up to 50NB. They are available in Threaded as well as Socket Weld ends. Hard Faced Trim material ensures perfect Sealing and longer life. Lapped Back Seat is provided to ensure re-packing/replacing of Gland Packing in stream, when the Valve is in full open condition which ensures maximum safety, convenience and economy. If required, Valves can be offered under any THIRD PARTY INSPECTION.

“VALTECH” Globe Valves are available in various materials like Forged Carbon Steel conforming to ASTM-A-105, Forged Alloy Steel like ASTM-A-182-F11, F22 and Forged Stainless Steel like ASTM-A-182 F304, F304L, F316 and F-316L. Size range starts from 15 NB through 50NB and pressure rating up to ANSI 2500#.

MANUFACTURING REFERENCE STANDARDS

Design API 602 / ANSI B 16.34 / BS-EN-ISO-15761-2002


Ends Socket Weld to ANSI B 16.11 / Screwed to ANSI B 2.1

Testing API 598

MATERIAL OF CONSTRUCTION

| Sr.No. | Parts Name | Material | | |
|--------|----------------|---|-------------|-----------------|
| | | Carbon Steel | Alloy Steel | Stainless Steel |
| 1 | Body | FCS | FAS | FSS |
| 2 | Bonnet | A-105 | F-11/F-22 | F-304/316 |
| 3 | Seat Ring | SS-410 | SS-410 | SS-304/316 |
| 4 | Plug | CA-15 | CA-15 | CF8/CF8M |
| 5 | Spindle | SS-410 | SS-410 | SS-304/316 |
| 6 | Gasket | Spiral wound SS-304/316 with Grafoil filled | | |
| 7 | Bonnet Bolt | Alloy steel A-193 Gr. B7 | | |
| 8 | Screw | Carbon Steel | | |
| 9 | Washer | Carbon Steel | | |
| 10 | Gland Packing | Grafoil | | |
| 11 | Gland Bush | SS-410 | SS-410 | SS-304/316 |
| 12 | Gland Flange | Forged Carbon Steel ASTM-A-105 | | |
| 13 | Eye Bolt & Nut | Alloy steel / Carbon steel | | |
| 14 | Yoke Sleeve | S.G. Iron ASTM-A-536 Gr. 80-55-06 | | |
| 15 | Hand Wheel | Malleable Iron | | |
| 16 | Hand Wheel Nut | Carbon Steel | | |
| 17 | Back Seat | Integral with Bonnet | | |

DIMENSIONS

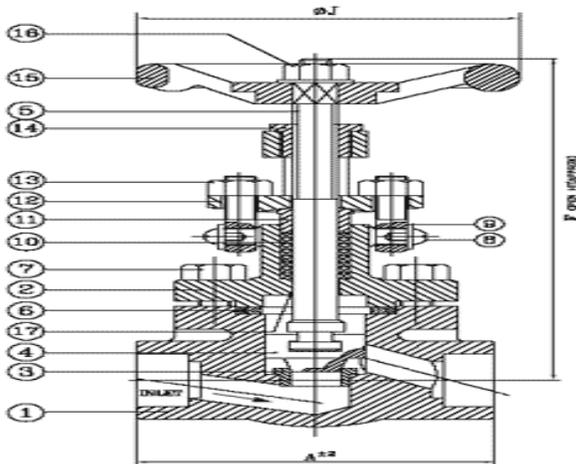

DIMENSIONS

| SIZE | | 800# | | | 1500# | | | 2500# | | |
|------|--------|------|-----|-----|-------|-----|-----|-------|-----|-----|
| MM | INCH | A | Ø F | Ø J | A | Ø F | Ø J | A | Ø F | Ø J |
| 15 | ½" | 87 | 170 | 89 | 90 | 178 | 90 | 105 | 181 | 90 |
| 20 | ¾" | 90 | 177 | 89 | 105 | 195 | 90 | 128 | 260 | 145 |
| 25 | 1" | 105 | 186 | 89 | 128 | 269 | 152 | 128 | 276 | 145 |
| 32 | 1.1/4" | 128 | 268 | 146 | 142 | 295 | 152 | * | * | * |
| 40 | 1.1/2" | 128 | 268 | 146 | 142 | 314 | 152 | * | * | * |
| 50 | 2" | 142 | 284 | 146 | * | * | * | * | * | * |

Cast Steel Globe Valve (Bolted Bonnet)



“VALTECH” robust design, Cast Steel Globe Valves are designed and manufactured with reference to Standard BS-1873 for Pipelines 50NB and above. They are available in Flanged and Buttweld ends. Hard Faced Trim material ensures perfect Sealing and longer life. Lapped Back Seat is provided to ensure re-packing/replacing of Gland Packing in stream, when the Valve is in full open condition which ensures maximum safety, convenience and economy. If required, Valves can be offered under any THIRD PARTY INSPECTION.

“VALTECH” Cast Steel Globe Valves are available in various materials like Cast Carbon Steel conforming to ASTM-A-216 Gr. WCB, Cast Alloy Steel like ASTM-A-217 Gr. WC-6 / WC-9; and Cast Stainless Steel like ASTM-A-351 Gr. CF-8, CF-3, CF-8M & CF-3M. Size range starts from 50 NB through 500NB and pressure rating from 150# to 600#.


MANUFACTURING REFERENCE STANDARDS

| | |
|-----------|--|
| Design | BS-1873 / ANSI B 16.34 |
| Ends | Flanged to ANSI B 16.5 / Butt Weld to ANSI B 16.25 |
| Testing | API 598 |
| Operation | Handwheel, Gear, Actuator. |

MATERIAL OF CONSTRUCTION

| Sr.No. | Parts Name | Material | | |
|--------|-----------------------|--|---------------------------------|-----------------------------------|
| | | Carbon Steel | Alloy Steel | Stainless Steel |
| 1 | Body | CCS A-216 Gr.WCB | CAS A-217 Gr.WC6/WC9 | |
| 2 | Bonnet | | | CSS A-351 Gr.CF8/CF8M |
| 3 | Plug | Carbon Steel Gr.WCB | A-216 WC6/WC9+ 13% Cr + Stld | |
| 4 | Seat Ring (Seal Weld) | + 13% Cr Faced | SS A-240TP 304 + Stld | Integral with Body |
| 5 | Spindle | | | |
| 6 | Spindle Locking Plate | Stainless Steel A-276 TP 410 | | Stainless Steel A-276 TP 304 /316 |
| 7 | Thrust Washer | | | |
| 8 | Gasket | Spiral Wound SS304/316 with Grafoil Filled | | |
| 9 | Bonnet Stud | Alloy Steel A-193 Gr. B7 | | |
| 10 | Bonnet Stud Nut | Carbon Steel A-194 Gr.2H | | |
| 11 | Bonnet Bush | Stainless Steel A-276 TP 410 | | Integral with Bonnet |
| 12 | Gland Packing | Grafoil | | |
| 13 | Gland Bush | Stainless Steel A-276 TP 410 | | SS 304/316 |
| 14 | Gland Flange | Carbon Steel IS 2062 | | |
| 15 | Cross Bolt & Nut | Carbon Steel A-307 Gr.B/A-563 Gr.A | | |
| 16 | Eye Bolt | | | |
| 17 | Yoke Sleeve | S.G. Iron ASTM-A-536 Gr. 80-55-06 | | |
| 18 | Spindle Guide | Carbon Steel IS 2062 | | |
| 19 | Lubricator | Steel (Commercial) | | |
| 20 | Gear Casing | Standard (Commercial) | | |
| 21 | Thrust Bearing | Bearing Steel | | |
| 22 | Gear Housing | | | |
| 23 | Gear Carrier | Carbon Steel A-216 Gr.WCB | | |
| 24 | Hand Wheel Key | Carbon Steel IS 2062 | | |
| 25 | Hand Wheel | Fabricated Carbon Steel | | |

DIMENSIONS

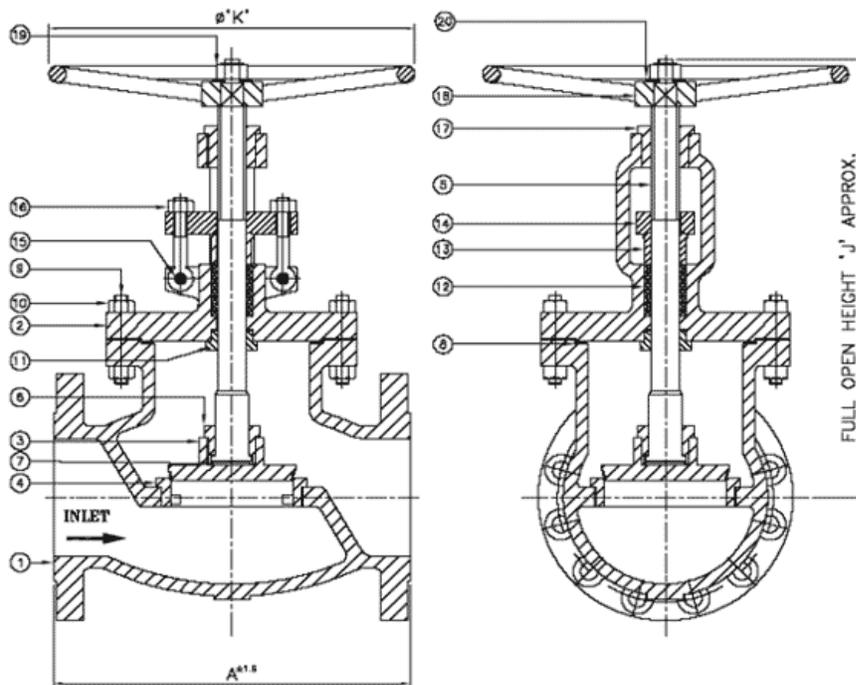

DIMENSIONS

| SIZE | | 150# | | | 300# | | | 600# | | |
|------|--------|------|------|-----|-------|------|------|------|------|-------|
| MM | INCH | A | J | ØK | A | J | ØK | A | J | ØK |
| 50 | 2" | 203 | 375 | 203 | 267 | 360 | 254 | 292 | 478 | 254 |
| 65 | 2.1/2" | 216 | 395 | 254 | 292 | 395 | 254 | 330 | 565 | 305 |
| 80 | 3" | 241 | 432 | 254 | 318 | 426 | 305 | 356 | 618 | 356 |
| 100 | 4" | 292 | 508 | 305 | 356 | 495 | 356 | 432 | 677 | 406 |
| 125 | 5" | 356 | 530 | 305 | * | * | * | * | * | * |
| 150 | 6" | 406 | 566 | 356 | 444 | 606 | 406 | 559 | 780 | 610 |
| 200 | 8" | 495 | 626 | 457 | 569 | 713 | 508 | 661 | 1175 | 610 |
| 250 | 10" | 622 | 750 | 508 | 622.5 | 895 | 610 | 787 | 1362 | 248 |
| 300 | 12" | 698 | 1108 | 610 | 711 | 1010 | 762 | 838 | 1451 | 298.5 |
| 350 | 14" | 787 | 1359 | 762 | 838 | 1143 | 864 | * | * | * |
| 400 | 16" | 914 | 1315 | 864 | 864 | 1194 | 965 | * | * | * |
| 450 | 18" | * | * | * | 978 | 1346 | 1016 | * | * | * |
| 500 | 20" | * | * | * | 1016 | 1473 | 1067 | * | * | * |

Cast Steel Globe Valve (Pressure Seal Bonnet)



“VALTECH” robust design, Cast Steel Pressure Seal Globe Valves are designed and manufactured with reference to Standard BS-1873 for Pipelines 50NB and above. They are available in Flanged and Butt weld ends. Hard Faced Trim material ensures perfect Sealing and longer life. Lapped Back Seat is provided to ensure re-packing/replacing of Gland Packing in stream, when the Valve is in full open condition which ensures maximum safety, convenience and economy. If required, Valves can be offered under any THIRD PARTY INSPECTION .

“VALTECH” Cast Steel Pressure Seal Globe Valves are available in various materials like Cast Carbon Steel conforming to ASTM-A-216 Gr. WCB, Cast Alloy Steel like ASTM-A-217 Gr. WC-6 / WC-9; and Cast Stainless Steel like ASTM-A-351 Gr. CF-8, CF-3, CF-8M & CF-3M. Size range starts from 50 NB through 300NB and pressure rating from 900# to 2500#.

MANUFACTURING REFERENCE STANDARDS


| | |
|-----------|--|
| Design | BS-1873 / ANSI B 16.34 |
| Ends | Flanged to ANSI B 16.5 / Butt Weld to ANSI B 16.25 |
| Testing | API 598 |
| Operation | Handwheel, Gear, Actuator. |

MATERIAL OF CONSTRUCTION

| Sr.No. | Parts Name | Material |
|--------|------------------|--|
| 1 | Body & Bonnet | ASTM A216 Gr. WCB, ASTM A 352 Gr. LCB, ASTM A 351 Gr. CF8/CF8M/CF3/CF3M |
| 2 | Disc & Seat Ring | ASTM A 216 Gr. WCB, ASTM A 351 Gr. CF8/CF8M/CF3/CF3M Seal faces are stellite |
| 3 | Stem & Gland | ASTM A 276 Type 410/304/316 |
| 4 | Yoke Sleeve | S.G. Iron |

- 5 Gland Packing Grafoil
- 6 Pressure Seal ring Expanded Graphite
- 7 Stud / Nut ASTM A 193 Gr. B7/B8 & ASTM A 194 Gr. 2H/8
- 8 Yoke & Hand Wheel Carbon Steel

DIMENSIONS

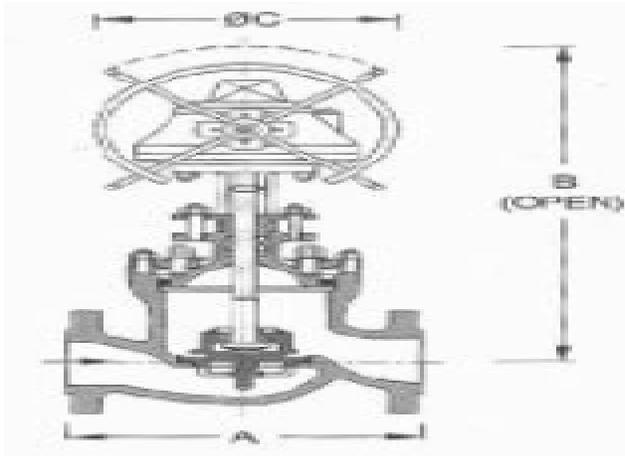

DIMENSIONS

| SIZE | | 900# | | | 1500# | | 2500# | | | |
|------|--------|------|------|-----|-------|------|-------|-----|------|-----|
| MM | INCH | A | B | C | A | B | C | A | B | C |
| 50 | 2" | * | * | * | 368 | 570 | 600 | 279 | 620 | 450 |
| 65 | 2.1/2" | * | * | * | 419 | 580 | 600 | * | * | * |
| 80 | 3" | 381 | 515 | 600 | 470 | 630 | 750 | 368 | 785 | 750 |
| 100 | 4" | 457 | 715 | 750 | 546 | 1085 | * | 457 | 1210 | * |
| 125 | 5" | 559 | 1060 | * | 673 | 1145 | * | * | * | * |
| 150 | 6" | 610 | 1350 | * | 705 | 1135 | * | 610 | 1390 | * |
| 200 | 8" | 737 | 1510 | * | 832 | 1475 | * | 762 | 1455 | * |
| 250 | 10" | 838 | 1555 | * | 991 | 1570 | * | * | * | * |
| 300 | 12" | 965 | 2035 | * | 1130 | 1735 | * | * | * | * |