


Concrete Busters

Our Concrete Busters are perfectly designed for primary demolition of wide reinforced concrete structures. Concrete Busters are ideal for demolishing thick foundation walls and they make light work of cracking girders and heavy concrete at extreme heights.

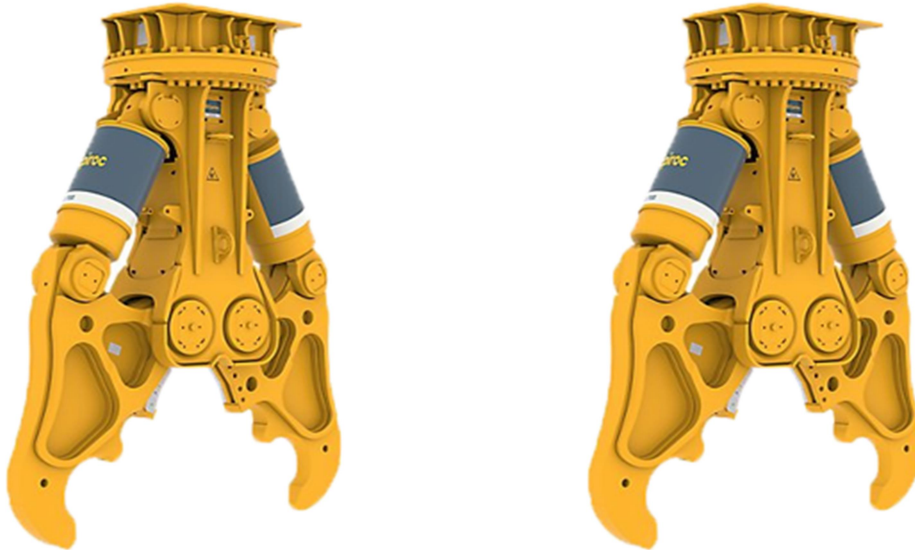

Description

- CB range CB 350 CB 750 CB 950 CB 2500
- Carrier weight class 2-8 t 7-14 t 12-20 t 20-35 t
- Service weight 320 kg 730 kg 940 kg 2600 kg
- Product weight 290 kg 617 kg 794 kg 2370 kg
- A 907 mm 1374 mm 1700 mm 2260 mm
- B 380 mm 480 mm 680 mm 1100 mm
- C 219 mm 269 mm 324 mm 750 mm
- D 90 mm 140 mm 140 mm 240 mm
- F 1199 t 236 t 312 t 360 t
- F 253 t 57 t 89 t 100 t
- Cycle time (opening/closing) 3.8/3.0 sec 3.4/2.6 sec 5.8/5.0 sec 3.8/2.8 sec
- Oil flow rate (opening/closing) 50—90 l/m in 90-180 l/m in 90-180 l/m in 150-250 l/m in
- Max. operating pressure (opening & closing) 300 bar 350 bar 350 bar 350 bar
- Oil flow rate (rotation) 5-10 l/min 20-25 l/min 20-25 l/min 35-50 l/min
- Max. operating pressure (rotation) 170 bar 210 bar 210 bar 170 bar