INDUCTION Heaters



Applications: Injection Molding Machines, Blow Moulding Machine & Various Extruder Machines

Working Principle

In the current technology of heaters (ceramic/mica heaters),

heat is transferred to the barrel by means of conduction. However, the induction heater uses magnetic field to directly generatrs heat in the barrel. In the figure, the blue cable

denotes the copper cable with special insulation coating to enhance magnetic field. It is wound around the grey barrel like a solenoid. Cable produces alternating magnetic field, which gets linked with the barrel directly generating heat in the barrel.

UP TO 70% POWER SAVER


Note: Blue cable does not get heated, thus keeping the exterior cool and lower the factory ambient temperature IH beater starts producing almost heat instantaneously. Therefore, Induction heater can achieve temperature in half the time as compared to traditional band heaters.







ELECTRICAL CONNECTION Drawing

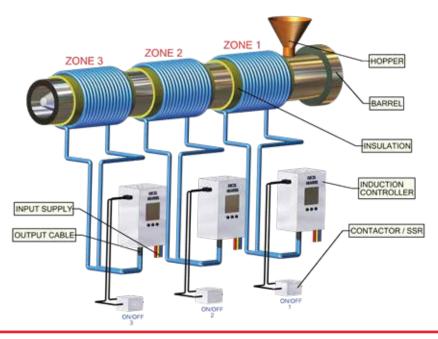

www.excelheaters.com 03

FEATURES



- Power Saving up to 70%
- Distributes heat uniformly- better quality of output product
- High heating speed- achieves temperature in half the time as compared to band heaters
- Instant heating and cooling response improving quality
- Lowers total harmonic distortion- protects other electronics
- Lowers factory ambient temperature (max sheath temperature of 70°C) reducing air conditioning expenses
- Longer Working Life of the heaters
- Maintenance of the heater is easier-controller will display any fault with the heater and can be easily fixed
- Higher Safety Features







www.excelheaters.com 04