

- Halftone printing available with ceramic anilox roll & chambered doctor blade system.
- Servo motors, automatic splicing on winder & unwinder available.
- Online web inspection system available.
- Hydraulic lifting of printing cylinder and continuous rotation of anilox roll driven system available.
- Online automatic ink viscosity control available.



J P EXTRUSIONTECH LIMITED

- Turret Unwinder with online manual splicing.
- Efficient and advanced Motorized Auto Tension Control system on unwinder.
- Infeed and outfeed system to maintain constant tension of fabric for proper Print registration.
- Inline perforating unit.

6 Colour

**Printing** 

Line Speed 150 m/min

- High frequency IGBT based Corona
- Printing and cutting speed—80 to 90
- Maximum printing width upto 760 mm.
- Maximum cutting length upto 1250 mm.
- Specially designed Micrometric adjustment system provided at each printing station to have better printing sharpness.

- Individual Gear Box System consists of hardened and ground oil dipped gears with inbuilt planetary arrangement at each printing station. This increases the sturdiness of machine which reduces maintenance and downtime.
- Online print registration adjustment is also facilitated with same gear box.
- Easy changeover for change of direction of printing with the help of same gear box system is also incorporated.
- Anilox and Ink rubber rolls are of special design. This prevents splashing and scattering of lnk at higher operating speeds.
- Improved design of Anilox roll which will give maximum numbers of impressions with minimum consumption of ink at each station.

- Central lubrication system for all printing cylinders.
- Access to each printing station for ease of monitoring and cleaning.
- Air drying system or infrared heater drying system for ink.
- Operator friendly and space saving Vertical Gusseting unit.
- Roll to roll printing facility with surface winder. (4 rolls surface winder) with oscillation system, Control panel with PLC system.
- AC variable drive control system with central control cabinet provided for complete machine.
- Doctor Chamber Blade with Ceramic Rolls available on request.
- Online twist gusseting facility available.

\* Specifications subject to change without prior notice due to It is not possible to reach continuous developments. These are indicative and not binding. all maximum values at the Please refer quotation for technical details and scope of supply.

same time



An ISO 9001:2008 Certified Company

## J P EXTRUSIONTECH LTD.

(Formerly: J P INDUSTRIES)

Corporate Office:


CIB - 1034 to 1037 GIDC Industrial Estate Ankleshwar - 393 002, Dist. Bharuch, Gujarat, INDIA Phones: + 91 2646 221134, 222163, 251083, 250194 Fax: + 91 2646 250196 E-mail: info@jpel.in Web Site: www.jpel.in

Mumbai Office:

A-34, Virwani Industrial Estate, Western Express Highway Goregaon (E) Mumbai - 400 063 INDIA Phone: + 91 22 61363900 Fax: + 91 22 66978478 E-mail: mumbai@jpel.in





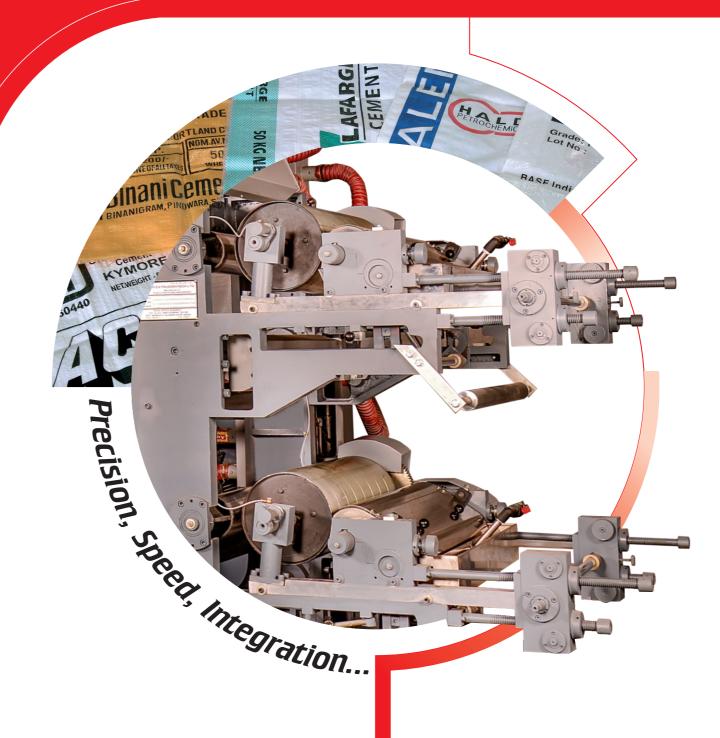

4, 6 & 8 Colour **Printing** 





