



LEHRY VALVES

Where Flow and Pressure Meet Quality

DI BUTTERFLY VALVE - PN 25

LEHRY MAKE Butterfly valves are most suitable for wide range of industrial applications. These Valves can be integrated with a consistent range of actuators to create complete flow control packages. Versatile ranges of resilient seated quarter turn butterfly valves are available in various configuration and materials to match critical applications. Higher end quality inspection ensures 100% compliances of safety measures, specified pressure rating and each valve assures tight shut-off.

Features :-

- ❖ No pins between shaft and disk connection; this eliminates the possibility of electrolytic corrosion
- ❖ Self lubricated plain bearings for both drive and non-drive end shaft ensures minimum bearing friction torque
- ❖ Choice of seat and disc material to suit media and service requirements
- ❖ Adaptability to lift between companion flanges for all popular flanges standards for water style body
- ❖ Extended stem design for insulated line.



APPLICATIONS


- ❖ General Circuit water industries
- ❖ Flow Shut Off or Regulating Function in sectors including water supply of Irrigation, HVAC.

Test Pressure

Body	: 37.5 Kg/Cmsq
Seat	: 25 Kg/Cmsq

Specification


SL. No	PARTS NAME	MATERIAL
1	Upper Shaft Sealing Nut	WCB
2	Shaft Seal	EPDM
3	Body	DI
4	Upper Shaft	SS410
5	Disc	DI + EPDM / CF8M
6	Lower Shaft	SS416
7	Lower Shaft Sealing Nut	WCB
8	End Face Seal	EPDM
9	Handle	Malleable

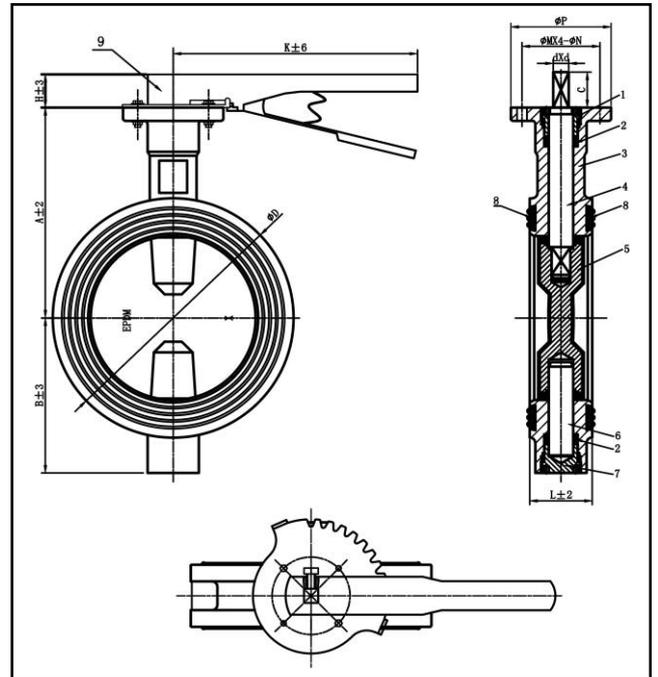

(Dimensions)

(All Dimensions are in mm)

Size	A	B	C	D	H	K	P	M	N	d	L	Weight (Kg)	
INCHES	MM												
2	50	110	85	32	100	32	267	90	70	9	10	42	8..4
2 ½	65	125	95	32	112	32	267	90	70	9	10	44.2	8.7
3	80	140	100	32	120	32	267	90	70	9	11	45.3	8.8
4	100	160	100	32	161	32	267	90	70	9	14	52	10.8
5	125	170	125	32	182	32	267	90	70	9	14	54.4	12.0

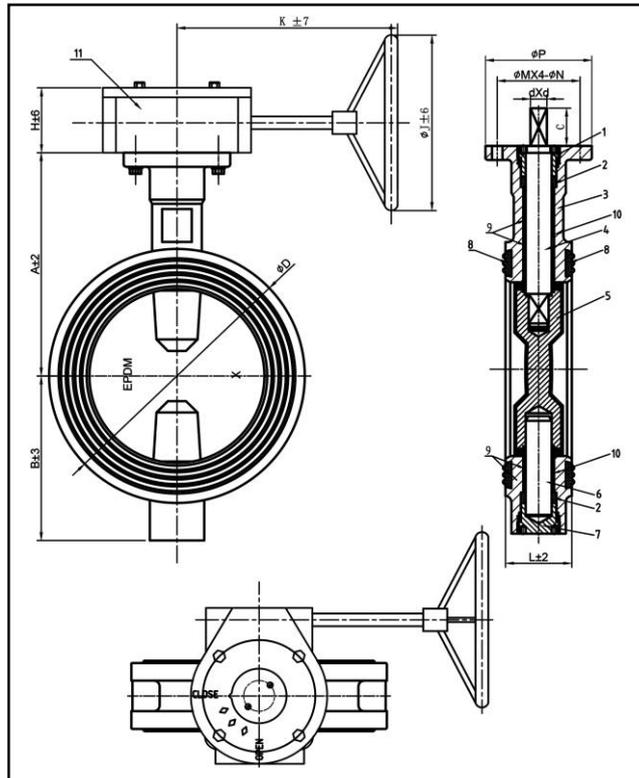

Specification

SL. No	PARTS NAME	MATERIAL
1	Upper Shaft Sealing Nut	WCB
2	Shaft Seal	EPDM
3	Body	DI
4	Upper Shaft	SS410
5	Disc	DI + EPDM / CF8M
6	Lower Shaft	SS416
7	Lower Shaft Sealing Nut	WCB
8	End Face Seal	EPDM
9	Stem Bushing	PTFE / C954
10	O-Ring	EPDM
11	Gear Box	EPDM

(Dimensions)

(All Dimensions are in mm)

Size		A	B	C	D	H	K	J	P	M	N	d	L	Weight (Kg)
INCHES	MM													
6	150	190	140	32	216	65	151	200	90	70	9	16	55.8	14.6
8	200	230	175	37	230	77	233	290	125	102	12	19	60.5	26.7
10	250	260	200	45	320	77	233	290	125	102	12	22	66.5	33.7
12	300	300	240	45	375	77	226	290	150	125	14	26	76.9	62.1

LEHRY INSTRUMENTATION & VALVES PVT. LTD

"Lehry Chambers" # 78 (Old No.51) Sembudoss Street,
PB No. 1506, Parys Chennai - 600 001.



Chennai, Bangalore, Hyderabad, Vishakapatnam, Kolkata, Mumbai, Noida.
: 044-25226995, 25225185, 25226187

: info@lehry.com

Chennai, Jalandhar, Ahmedabad.
: www.lehryvalves.com